


HYPERLINE FX[®]

PTFE hose for automotive and general purpose applications

Smooth bore, but with much improved flexibility due to the externally convoluted PTFE liner design

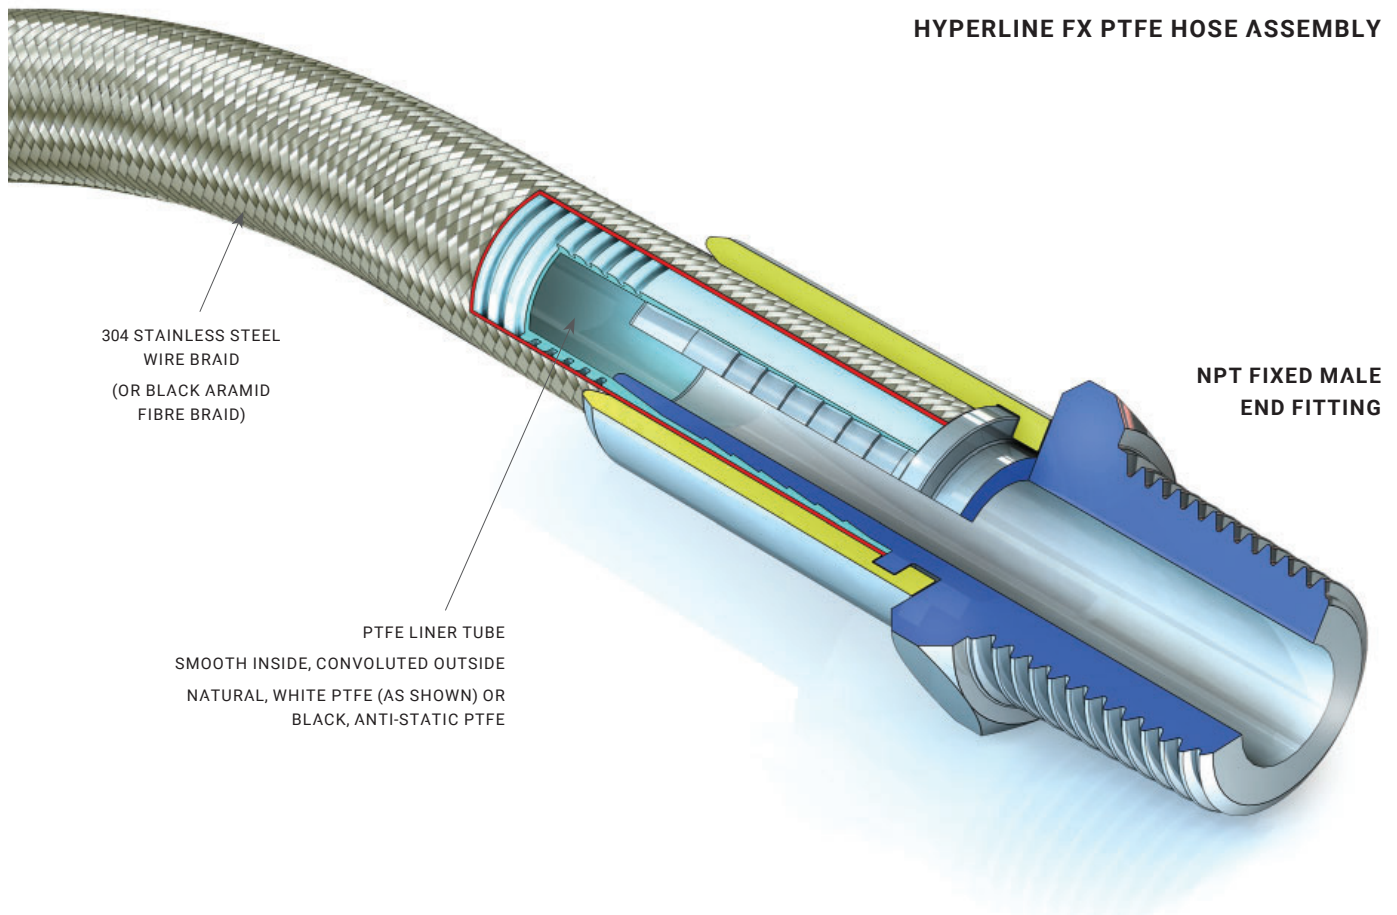

HYPERLINE FX HOSE SPECIFICATIONS

HOSE BORE SIZE RANGE -

1/4" (6MM) UP TO 1" (25MM)

HOSE LENGTHS -

ALL SIZES UP TO 18 METRES (60 FEET)

CUT LENGTHS AND PREFORMED LENGTHS AVAILABLE

TEMPERATURE LIMITS -

-73°C (-100°F) UP TO +260°C (+500°F), DEPENDING ON PRESSURE

WORKING PRESSURE RATINGS -

Stainless Steel Braided (SS grade)

FROM 88 BAR (1280 PSI) FOR 1/4" TO 40 BAR (580 PSI) FOR 1"

Aramid Fibre Braided (AM grade)

FROM 62 BAR (900 PSI) FOR 1/4" TO 28 BAR (400 PSI) FOR 1"

VACUUM LIMITATIONS -

USABLE AT VACUUM TO -0.9 BAR FOR ALL SIZES OF SS
BRAIDED HOSE UP TO 150°C (300°F)

END FITTING OPTIONS

BSPT AND NPT MALE AND FEMALE, BSP AND NPSM CONE
AND FLAT SEAT FEMALE UNION FITTINGS, JIC THREADED
FITTINGS, STANDPIPE FITTINGS AND MANY MORE

STANDARD BRAID OPTIONS -

STAINLESS STEEL WIRE OR BLACK ARAMID FIBRE BRAID

ALTERNATIVE DESIGN OPTIONS (to special order) -

PVC, NYLON II, SARLINK, HYTREL, PEROXIDE CURED SILICONE
AND OTHER PLASTIC COVERS, CLEAR OR COLOURED, WITH
PRINTING

Specifications listed below are for non-antistatic grades. For anti-static (AS) grades the specifications are all the same, except that "AS" is added to the grade reference, and the part number reads "-110-" in place of "-100-".

Nominal Hose Size		*Actual Hose Bore Size		Hose Grade	Outside Diameter of Tube or Braid		Minimum Bend Radius		Maximum Working Pressure (MWP)		Weight per Unit Length		Hose Part Number
in	mm	mm	in	**	in	mm	in	mm	Bar	Psi	Kg/mtr	Lbs/Ft	
1/4	6.0	6.8	0.270	TO	0.354	9.0	1 1/2	38	4	60	0.041	0.027	92-100-04
				SS	0.378	9.6	3/4	19	88	1,280	0.092	0.062	92-100-04-01-02
				AM	0.378	9.6	1 1/2	38	62	900	0.056	0.038	92-100-04-01-55-01
5/16	8.0	7.9	0.312	TO	0.394	10.0	1 1/2	38	4	60	0.056	0.037	92-100-05
				SS	0.420	10.6	3/4	19	84	1,220	0.126	0.084	92-100-05-01-02
				AM	0.445	11.3	1 1/2	38	59	850	0.075	0.050	92-100-05-01-55-01
3/8	10.0	10.0	0.394	TO	0.492	12.5	2	50	4	60	0.070	0.047	92-100-06
				SS	0.534	13.5	1	25	80	1,160	0.160	0.107	92-100-06-01-02
				AM	0.534	13.5	2	50	56	810	0.100	0.067	92-100-06-01-55-01
1/2	15.0	13.6	0.536	TO	0.640	16.2	3	76	4	58	0.110	0.074	92-100-08
				SS	0.690	17.5	1 1/2	38	60	870	0.225	0.151	92-100-08-01-02
				AM	0.690	17.5	3	76	42	600	0.140	0.094	92-100-08-01-55-01
5/8	16.0	16.7	0.658	TO	0.787	20.0	4	100	3	44	0.161	0.108	92-100-10
				SS	0.831	21.1	2	50	50	730	0.336	0.226	92-100-10-01-02
				AM	0.831	21.1	4	100	35	510	0.204	0.137	92-100-10-01-55-01
3/4	20.0	19.8	0.780	TO	0.913	23.2	5	126	3	44	0.179	0.120	92-100-12
				SS	0.953	24.2	2 1/2	63	42	610	0.383	0.257	92-100-12-01-02
				AM	0.953	24.2	5	126	29	430	0.236	0.158	92-100-12-01-55-01
1	25.0	26.0	1.023	TO	1.193	30.3	6	150	2	29	0.268	0.180	92-100-16
				SS	1.250	31.7	3	75	40	580	0.540	0.362	92-100-16-01-02
				AM	1.250	31.7	6	150	28	400	0.354	0.237	92-100-16-01-55-01

***Hydraulic Bore Size** - The actual bore sizes of Hyperline FX hose are slightly larger than the nominal size, to allow the insertion and assembly of standard Hydraulic Fittings, using ferrules supplied by Aflex Hose.

**TO grade = Tube only

PROPERTIES

Temperatures and Pressures

Hyperline FX, SS Grades - The MWP listed above should be reduced by 1% for each 1°C above 160°C (1% for each 1.8°F above 320°F) up to a maximum of 260°C (500°F).

Hyperline FX, AM Grades - The MWP listed above should be reduced by 1% for each 1°C above 130°C (1% for each 1.8°F above 266°F) up to a maximum of 180°C (356°F).

Maximum Working Pressures (MWP) listed are calculated on the basis of a 3:1 safety factor relative to the burst pressure, so Burst Pressure = 3 x MWP. If MWP is required based on a 4:1 safety factor (e.g. EN 16643 requirement), multiply the listed value by 0.75.


LOOSE HOSE LENGTHS

Loose hose is supplied in random lengths up to a maximum of 18 metres (60 feet) long.

ASSEMBLED HOSE LENGTHS

Hyperline FX hose assemblies are made up to the specific lengths required. The hose length is taken as the length from the sealing face at one end of the hose to the same at the other end. The length tolerance is normally +2% / -0%. Closer tolerances are available to special order.

HYPFX - UK/02.04.19 Rev 3



A member of Watson-Marlow Fluid Technology Group.
A Spirax-Sarco Engineering plc company

UK

Spring Bank Industrial Estate
Watson Mill Lane
Sowerby Bridge
Halifax
West Yorkshire, HX6 3BW
Tel: +44 (0) 1422 317200
Fax: +44 (0) 1422 836000



WWW.AFLEX-HOSE.COM



Disclaimer: The information contained in this document is believed to be correct but Aflex Hose Limited accepts no liability for any errors it contains and reserves the right to alter specifications without notice. It is the users' responsibility to ensure product suitability for use within their application. Bioflex, Corroflon, Corroline, Hyperline FX, Pharmaline are registered trademarks of Aflex Hose Limited.